


Louvre pitch for varying angles				
Angle	80°	70°	60°	45°
Edinburgh	157	172	182	187
Manchester	147	163	174	181
London	140	157	169	178



CI/SfB | 76.7

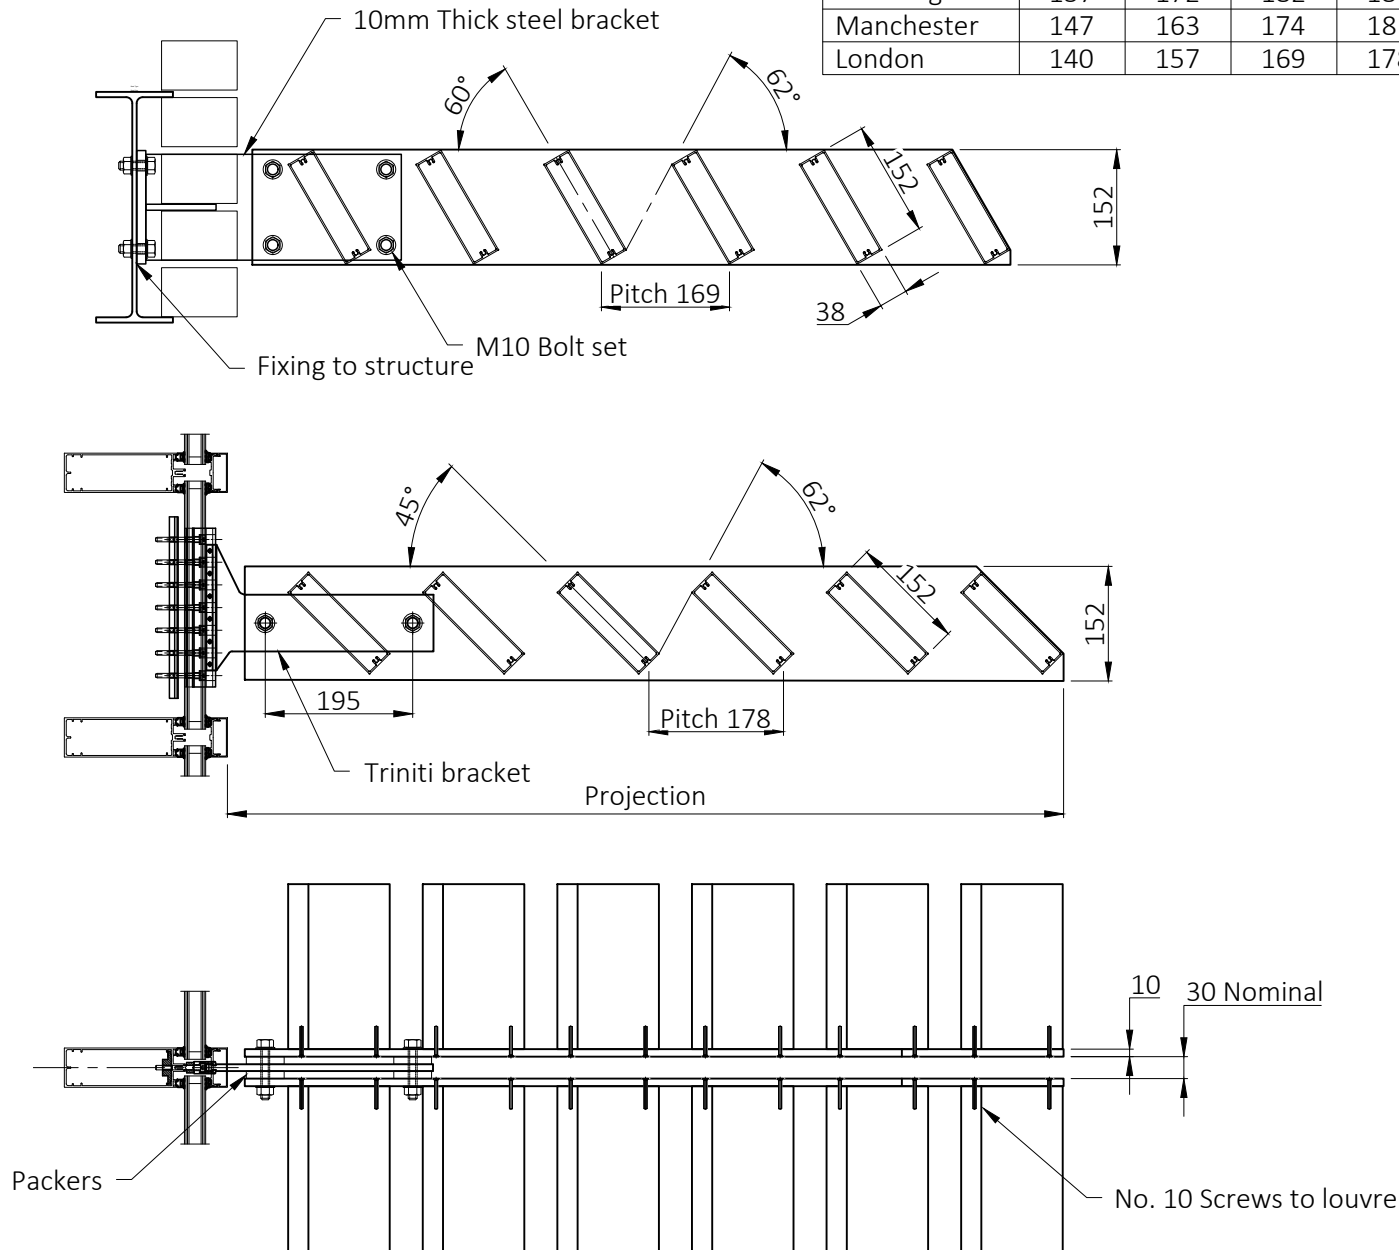

Drawing No.

G.A.900/Box/152/01

Specification

Manufacture and Reference: Levolut 900 box louvre solar shading system supplied and installed by Levolut Limited.

Description: Extruded aluminium box louvre blade 152x38mm fixed between side plates.

Material: System manufactured from 6000 series aluminium alloys.

Fire Classification: The Classification of aluminium used in construction products for reaction to fire is Class A1 without test (as EU Directive 96/603/EC).

The polyester powder coating has a classification for reaction to fire of A2, s1-d0 according to BS EN 13501-1:2018.

Finish: Polyester powder coated to RAL...., average 60 microns / anodised AA25 / mill finish / PVDF.

Dimensions: As shown on drawings.

Spans: Maximum spans vary with wind-load and building design and are limited to 1:150 deflection to span ratio.

Load	Maximum Span
0.9kN/m ²	3350mm
1.2kN/m ²	3000mm
1.5kN/m ²	2800mm

Performance: Louvres to be angled and pitched to eliminate direct sunlight through the louvre screen, or to meet aesthetic requirements.

Fixing: To subcontractors details. A wide range of stainless, galvanised steel or aluminium fixing brackets are available for different fixing grounds, including thermally broken curtain walling brackets.


Maintenance: Aluminium is corrosion resistant and virtually maintenance free, requiring only periodic cleaning using a solution of mild detergent in warm water with soft cloth or sponge.

Environmental Friendly: Aluminium is 100% recyclable.



Address: White House Works, Bold Road, St. Helens, Merseyside, United Kingdom, WA9 4JG
 Telephone: St. Helens: 01744 648400 Harrow: 0208 863 9111 Gloucester: 01452 500007
 Email: info@levolux.com Website: www.levolux.com
 Registered in England No: 1834176

152mm BOX LOUVRE BETWEEN SIDE PLATES

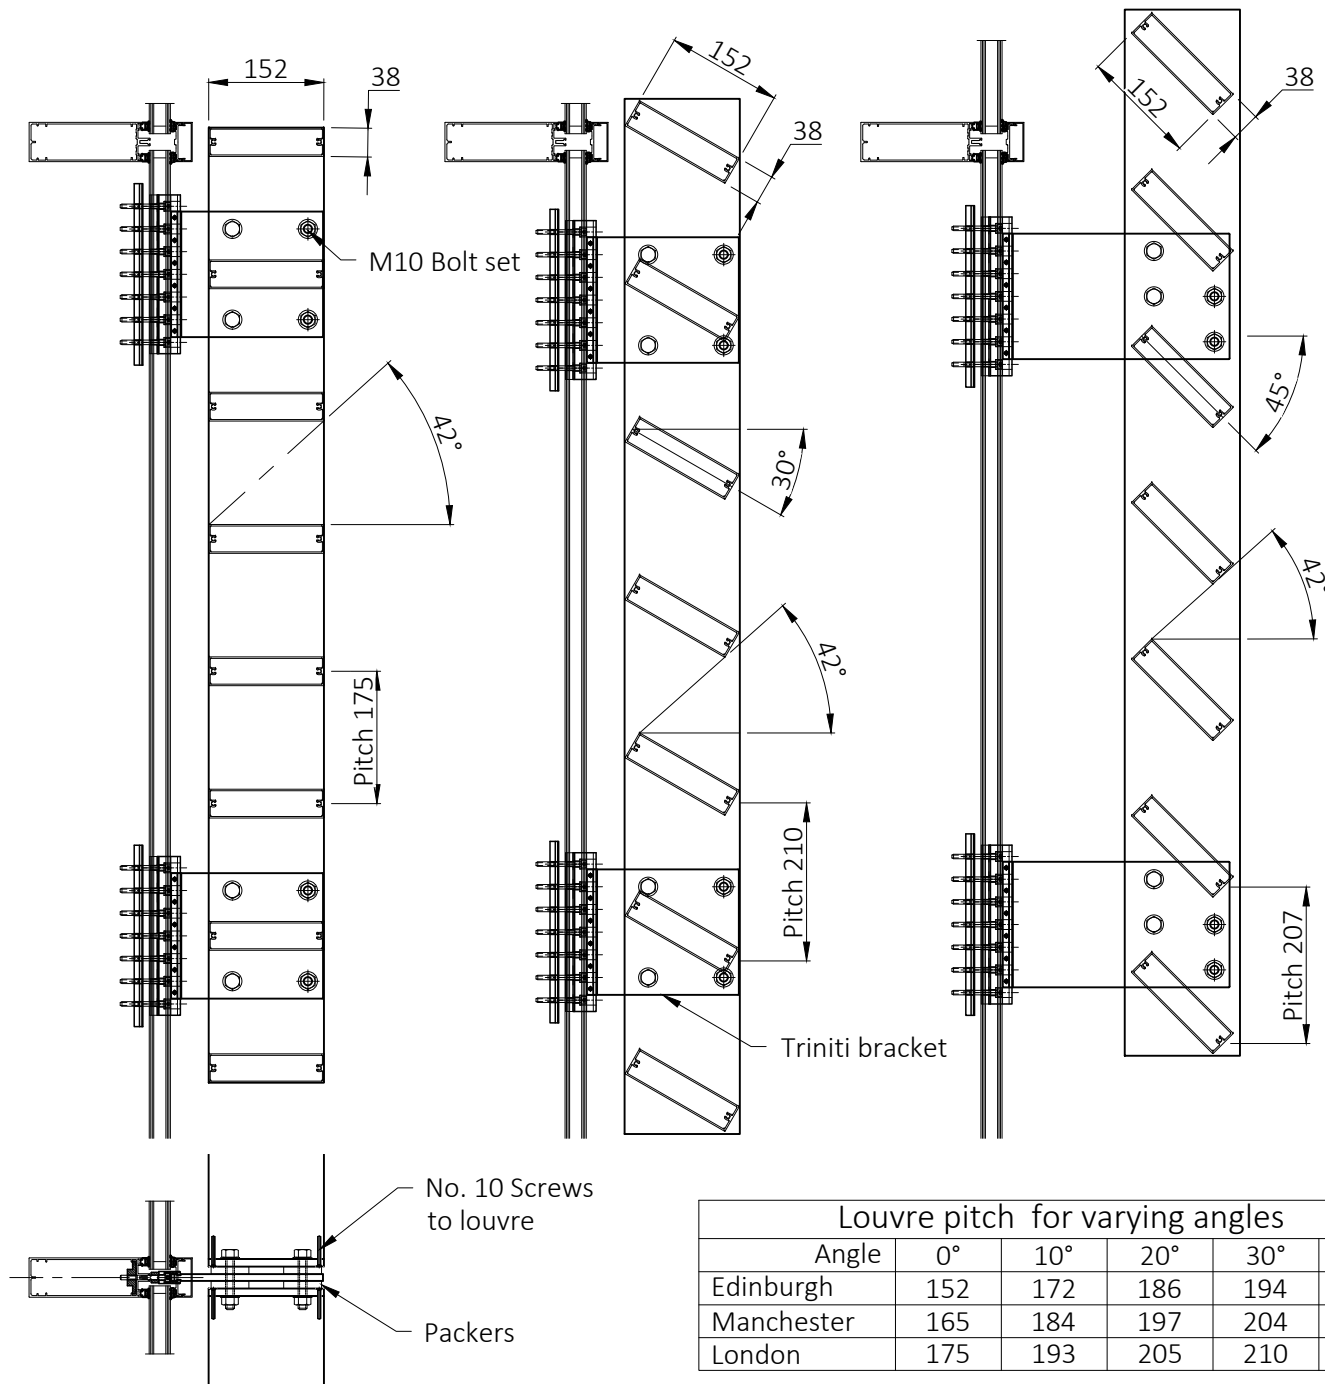

Louvre pitch for varying angles					
Angle	0°	10°	20°	30°	45°
Edinburgh	152	172	186	194	195
Manchester	165	184	197	204	202
London	175	193	205	210	207



CI/SfB 76.7

Drawing No.

G.A.900/Box/152/02

Specification

Manufacture and Reference: Levolut 900 box louvre solar shading system supplied and installed by Levolut Limited.

Description: Extruded aluminium box louvre blade 152x38mm fixed between side plates.

Material: System manufactured from 6000 series aluminium alloys.

Fire Classification: The Classification of aluminium used in construction products for reaction to fire is Class A1 without test (as EU Directive 96/603/EC).

The polyester powder coating has a classification for reaction to fire of A2, s1-d0 according to BS EN 13501-1:2018.

Finish: Polyester powder coated to RAL...., average 60 microns / anodised AA25 / mill finish / PVDF.

Dimensions: As shown on drawings.

Spans: Maximum spans vary with wind-load and building design and are limited to 1:150 deflection to span ratio.

Load	Maximum Span
0.9kN/m ²	3350mm
1.2kN/m ²	3000mm
1.5kN/m ²	2800mm

Performance: Louvres to be angled and pitched to eliminate direct sunlight through the louvre screen, or to meet aesthetic requirements.

Fixing: To subcontractors details. A wide range of stainless, galvanised steel or aluminium fixing brackets are available for different fixing grounds, including thermally broken curtain walling brackets.

Maintenance: Aluminium is corrosion resistant and virtually maintenance free, requiring only periodic cleaning using a solution of mild detergent in warm water with soft cloth or sponge.

Environmental Friendly: Aluminium is 100% recyclable.



Address: White House Works, Bold Road, St. Helens, Merseyside, United Kingdom, WA9 4JG
 Telephone: St. Helens: 01744 648400 Harrow: 0208 863 9111 Gloucester: 01452 500007
 Email: info@levolux.com Website: www.levolux.com
 Registered in England No: 1834176